

# SRS-M 4A

# SRS-M 7A

## MONOFAZNI REGULATOR BRZINE

## AUTOTRANSFORMATORA

## SINGLE PHASE TRANSFORMER SPEED REGULATORS



### OPIS

Varijatori napona, ručni sa autotransformatorom sa unapred podešenim 5-brzinskim biračem. Nema električnog brujanja u motoru. Pogodno za podesive jednofazne asinhronne motor.

### TEHNIČKE KARAKTERISTIKE


- Napajanje 230V-1Ph-50 / 60Hz.
- Nominalna struja  
SRS M-4A mak 4A / SRS M-7A mak 7A
- Indikator rada.
- Kontejner od aluminijuma obojenog epoksidom.
- IP55 zaštita.
- Radna temperatura  $-15^{\circ}\text{C} + 50^{\circ}\text{C}$ .
- Težina 5/8 kg

### DESCRIPTION


Manual voltage converter by transformer selector, 5 step options. Minimum magneto hum in the motor. Suitable for single phase asynchronous speed adjustable motors.

### TECHNICAL SPECIFICATIONS

- Supply 230V-1Ph-50/60Hz
- Rated current:  
SRS M-4A max 4A / SRS M-7A max 7A
- Pilot lighth.
- Housing epoxy painted aluminum.
- Protection IP55.
- Operating temperature  $-15^{\circ}\text{C} + 50^{\circ}\text{C}$ .
- Weight 5 / 8 Kg.

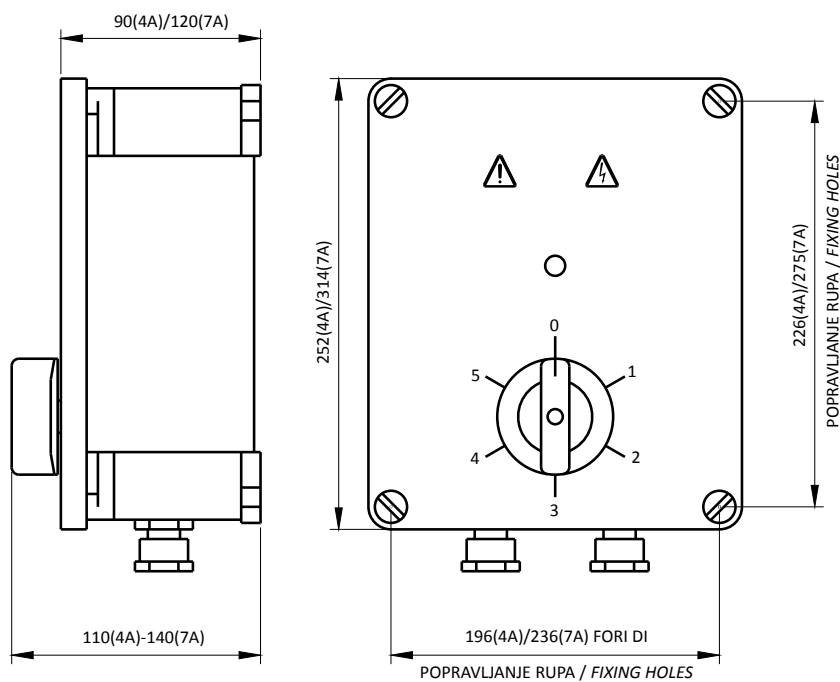

### Dijagram povezivanja WIRING DIAGRAM

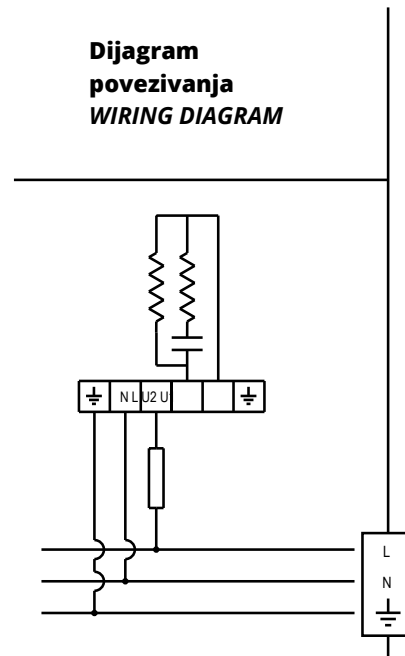

NAPAJANJE / SUPPLY: 230V-1Ph-50/60Hz